

# LL1x10-42-E-CC


## 1x42 W Constant Current LED driver

- Open & short circuit protection
- Adjustable and selectable constant current output: 120 (default) to 350 mA
- Maximum 42 W load
- High efficiency 0.94
- Suitable for Class I luminaires
- Wide operational range
- Protected up to 4 kV power network fast transients

**42 W 220-240 VAC 50-60 Hz**



### Connections

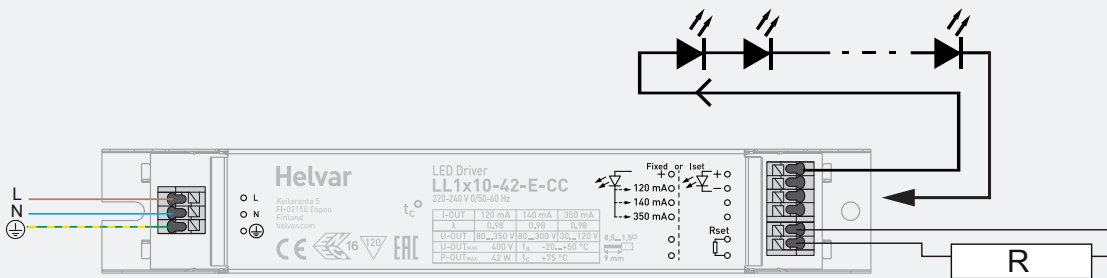

Current setting (p.2) **	
Resistor R	output I <sub>v</sub>
open	120 mA
0 Ω	350 mA

Note:

\* Not suitable for load side switching operation.

\*\* Connect load between terminal (+) and (120mA / Iset) for adjusted output currents.

### Mains Characteristics

Voltage range	198 - 264 VAC
DC range	176 - 280 VDC, Starting voltage > 190 VDC
Max mains current at full load	0.18-0.23 A
Frequency	0 / 50 - 60 Hz

### Load Output (Non-Isolated)

Output current (I-OUT)	120 mA (default) - 350 mA		
-Accuracy	+/- 5 %		
-Ripple	< +/- 12 % high frequency		
Max output power	42 W		
Efficiency, at full load, typical	>0.94		
U-OUT <sub>max</sub> (abnormal)	400 V		

	I-OUT 120 mA	140 mA	350 mA
P-out (max)	42 W	42 W	42 W
U-OUT	80 - 350 V	80-300 V	30-120 V
λ	0.98	0.98	0.98
η @ max	0.94	0.94	0.93

### Operating Conditions and Characteristics

Max.temperature at tc point	75 °C
Ambient temperature range	-20...+50 °C
Storage temperature range	-40...+80 °C
Maximum relative humidity	No condensation

Life time	60 000h, at TC max (90 % survival rate)
-----------	--

### Connections and Mechanical Data


Wire size	0.5 - 1.5 mm <sup>2</sup>
Wire type	Solid core and fine-stranded
Wiring insulation	According to EN 60598
Maximum driver to LED wire length	5 m
Weight	135 g
IP rating	IP20

### Conformity

General and safety requirements	EN 61347-1
Particular safety requirements for DC or AC supplied electronic controlgear for LED modules	EN 61347-2-13
Thermal protection class	EN61347, C5e
Mains current harmonics	EN 61000-3-2
Limits for Voltage Fluctuations and Flicker	EN 61000-3-3
Radio Frequency Interference	EN 55015
Immunity standard	EN 61547
Performance requirements	EN 62384

Compliant with relevant EU directives  
ENEC & CE marked


Note: See page 2 for dimensions

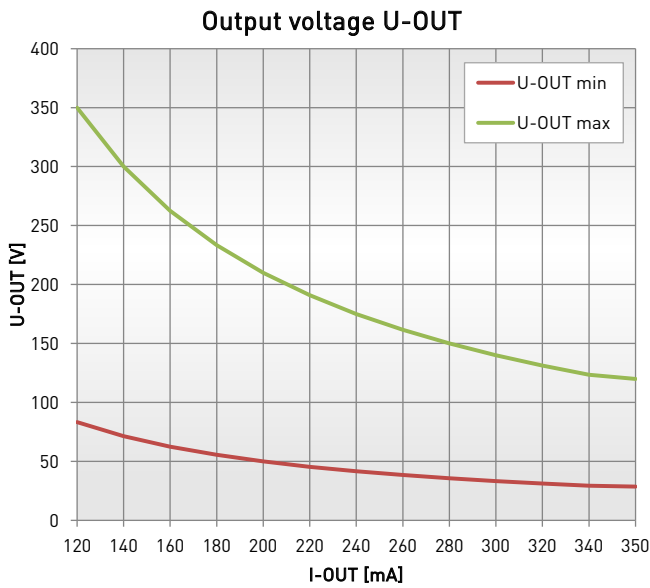

### Current setting resistor values

R (Ω)	0	47	120	180	270	330	470	560	680	820	1k	1,2k	1,5k	1,8k	2,2k	2,7k	3,3k	3,9k	4,7k	5,6k	8,2k	12k	22k	∞
I <sub>out</sub> (mA)	350	340	330	320	310	300	290	280	270	260	250	240	230	220	210	200	190	180	170	160	150	140	130	120

## Dimensions

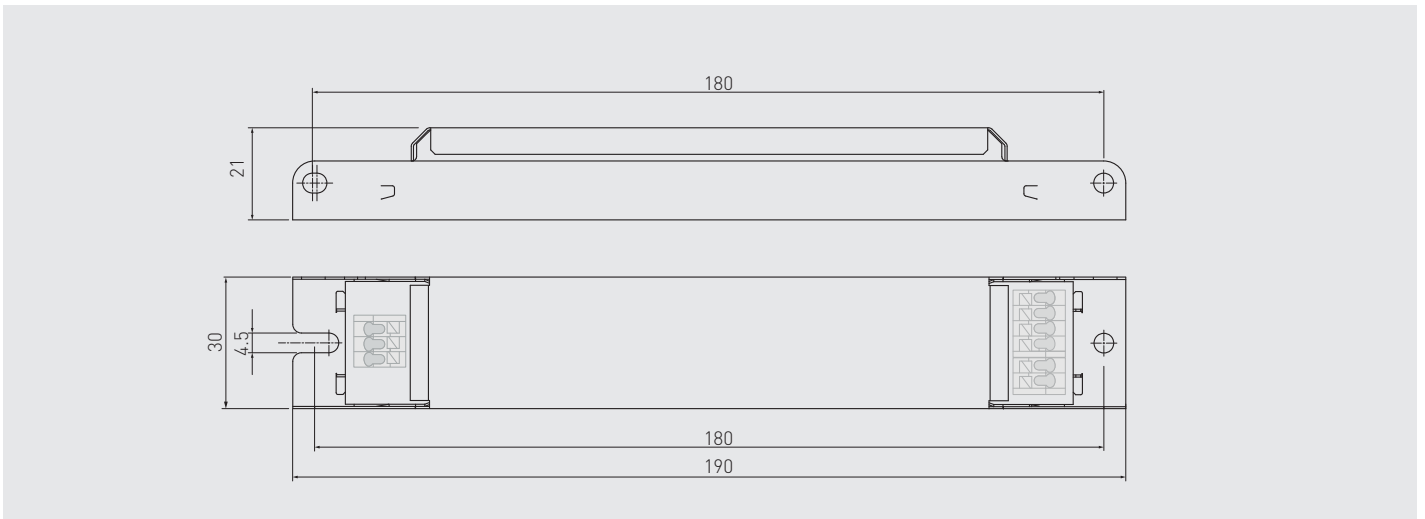

## Quantity of drivers per miniature circuit breaker 16 A Type C

Based on I <sub>cont</sub>	Based on I <sub>peak</sub>	Typ.inrush current	1/2 value time	Calculated energy
(pcs.)	(pcs.)	I <sub>peak</sub> (A)	Δt (μs)	I <sub>peak</sub> <sup>2</sup> Δt (A <sup>2</sup> s)
57	62	23	176	0.0672

LL1x10-42-E-CC LED driver is suited for in-built luminaire usage. In order to have safe and reliable LED driver operation, the LED luminaires will need to comply with the relevant standards and regulations (e.g. IEC/EN 60598-1). The LED luminaire shall be designed to adequately protect the LED driver from dust, moisture and pollution. The luminaire manufacturer is responsible for the correct choice and installation of the LED drivers according to the application and product datasheets. Operating conditions of the LED drivers may never exceed the specifications as per the product datasheets.

## Installation & operational considerations

### Maximum tc temperature

- Reliable operation and lifetime is only guaranteed if the maximum tc point temperature is not exceeded under the conditions of use.

### Installation site

- The general preferred installation position of LED drivers is to have the top cover facing upwards.

### Current setting resistor

The Helvar LL1x10-42-E-CC LED driver feature an adjustable constant current output.

- An external resistor can be inserted in to the current setting terminal, allowing the user to adjust the LED driver output current.
- When no external resistor is connected, then the LED driver will operate at their default lowest current level (120 mA).
- A standard through-hole resistor can be used for the current setting. To achieve the most accurate output current it is recommended to select a quality low tolerance resistor.

For the resistor / current value selection, please refer to the table on page 2.

### Miniature Circuit Breakers (MCB)

- Type-C MCB's with trip characteristics in according to EN 60898 are recommended.

### LED driver earthing

- For Helvar LED drivers to have a reliable operation and EMC performance, the luminaires are expected to have an earth connection.